



EPX-CS-TTL.A2

Housing 2 x 20 pitch 2,0 mm

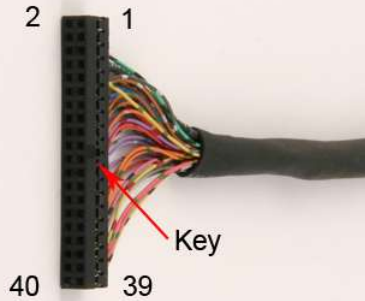

Hirose DF9-41S-1V

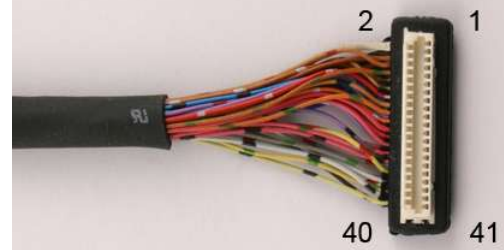

Signal Cable EPX-CS-TTL.A2		
Housing 2x20 Pin - 2mm.	Signal	Hirose DF9-41 - 41 Pins
1	N.C.	
2	N.C.	
3	ENAB	37
4	H Sync	4
5	V Sync	5
6 *	CLK	2
7 *	GND	1
8	N.C.	
9	N.C.	
10	RE0	9
11	RE1	10
12	GND	3 - 6
13	RE2	11
14	RE3	13
15	RE4	14
16	RE5	15
17	GND	7 - 8
18	N.C.	
19	N.C.	
20	GE0	19
21	GE1	20
22	GND	12 - 16
23	GE2	21
24	GE3	23
25	GE4	24
26	GE5	25
27	GND	17 - 18
28	N.C.	
29	N.C.	
30	BE0	29
31	BE1	30
32	GND	22 - 26
33	BE2	31
34	BE3	33
35	BE4	34
36	BE5	35
37	GND	27 - 28
38	VCC pan	39
39	VCC pan	40
40	N.C.	
	Mode Sel.	38
	Mode Sel.	41

* Shielded cable -Shield connected to the GND - Standard Length 250 mm.
The photos of the cables are purely indicative of the model and the connectors polarization.