



EPX-CS-TTL.A1

Housing 2 x 20 pitch 2,0 mm

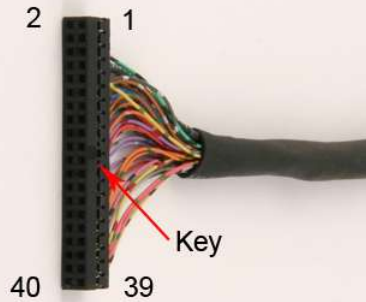

Hirose DF9-31S-1V

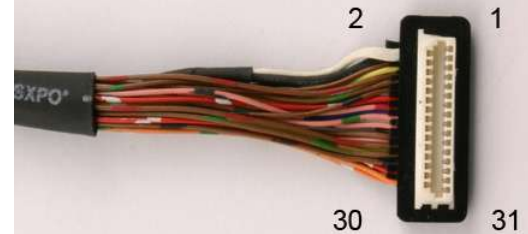

Signal Cable EPX-CS-TTL.A1		
Housing 2x20 Pin - 2mm.	Signal	Hirose DF9-31 - 31 Pins
1	N.C.	
2	N.C.	
3	ENAB	27
4	H Sync	3
5	V Sync	4
6 *	CLK	2
7 *	GND	1
8	N.C.	
9	N.C.	
10	RE0	6
11	RE1	7
12	GND	5
13	RE2	8
14	RE3	9
15	RE4	10
16	RE5	11
17	GND	12
18	N.C.	
19	N.C.	
20	GE0	13
21	GE1	14
22	GND	19
23	GE2	15
24	GE3	16
25	GE4	17
26	GE5	18
27	GND	26
28	N.C.	
29	N.C.	
30	BE0	20
31	BE1	21
32	N.C.	
33	BE2	22
34	BE3	23
35	BE4	24
36	BE5	25
37	N.C.	
38	VCC pan	28
39	VCC pan	29
40	N.C.	
	Mode Sel.	30
	Mode Sel.	31

* Shielded cable -Shield connected to the GND - Standard Length 250 mm.
The photos of the cables are purely indicative of the model and the connectors polarization.